



DETAIL AND SUBMITTAL SHEET

DISTRIBUTOR: _____ CONTRACTOR: _____

MODEL NUMBER: _____ PROJECT: _____

QUANTITY: _____ APPROVED BY: _____

ARCHITECT: _____ DATE: _____

JL INDUSTRIES
INCORPORATED


4450 W. 78th Street Circle
Bloomington, MN 55435
Phone: 952-835-6850
FAX: 952-835-2218

JL WEST COAST 6285 RANDOLPH STREET, COMMERCE, CA 90040 PHONE: 323-726-9070 FAX: 323-726-9068
JL SOUTH EAST 5758 CORPORATION CIRCLE, FT. MEYERS, FL PHONE: 941-693-7500 FAX: 941-693-7501

MULTI PURPOSE FLUSH ACCESS PANELS

MODEL TM FOR MASONRY, TILE AND WALLBOARD

This all-purpose 14 gauge steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The TM is primarily used for new installations or remodeling on masonry, tile, wood or other wall surfaces. The exposed 1" frame flange adds rigidity and conceals rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place. The unit is secured with screwdriver-operated cam locks, and a key-operated cylinder lock can be furnished in place of one cam lock. Nails, bolts or masonry anchors may be used to fasten the TM model securely in place.



OPTIONAL CYLINDER LOCK

MODEL TMS-STAINLESS STEEL ACCESS PANEL

This J.L. access panel is of the same high quality design as the Model TM, except that it is made of stainless steel #4 satin finish. The TMS meets the requirements of hospitals, restaurants and other high traffic areas where appearance, durability and extra resistance to impact and corrosion are the prime concerns. The TMS is fabricated for use in masonry, plastered and drywall surfaces. Flush mounted screwdriver latches are standard and key operated locks are available.

SPECIFICATIONS:

Materials TM

Door: 14 gauge steel
Frame: 16 gauge steel with 1" flange
Finish: Phosphate-dipped steel with prime coat.

Materials TMS

Door: 18 gauge stainless steel
Frame: 18 gauge stainless steel with 1" flange
Finish: #4 satin finish stainless steel

Lock

- ___ Flush screwdriver-operated steel cam standard.
- ___ Cylinder lock (with 2 keys) is available in place of one cam lock (at extra charge). Lock is key-coordinated to fit J.L. Fire Extinguisher cabinet as well. Also available hex head cam.

Packaging


One panel per carton

Options

- ___ TMS with 14 ga. door
 - ___ Louvered access panels
 - ___ Model SMT surface-mounted access panel
- Contact factory for details

MODEL TM AND TMS TOP VIEW

REFER TO TABLE

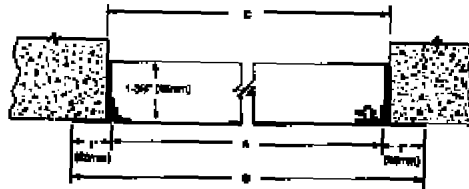

MODEL TM



MODEL TMS

DOOR SIZES AND WALL/CEILING OPENINGS: MODELS TM AND TMS

• DIMENSIONS IN INCHES • WEIGHT IN POUNDS						
A - MODEL SIZE WIDTH X HEIGHT	B - OUTSIDE FRAME DIMENSIONS		C - WALL OPENING DIMENSIONS		SHIPPING WEIGHT	LATCHES
	WIDTH	HEIGHT	WIDTH	HEIGHT		
___ 6" x 6"	8"	8"	6 3/8"	6 3/8"	4	1
___ 8" x 8"	10"	10"	8 3/8"	8 3/8"	4	1
___ 8" x 12"	10"	14"	8 3/8"	12 3/8"	6	1
___ 10" x 10"	12"	12"	10 3/8"	10 3/8"	6	1
___ 12" x 12"	14"	14"	12 3/8"	12 3/8"	7	1
___ 12" x 16"	14"	18"	12 3/8"	16 3/8"	9	1
___ 12" x 18"	14"	20"	12 3/8"	18 3/8"	10	1
___ 12" x 24"	14"	26"	12 3/8"	24 3/8"	12	2
___ 14" x 14"	16"	16"	14 3/8"	14 3/8"	9	1
___ 16" x 16"	18"	18"	16 3/8"	16 3/8"	11	1
___ 16" x 20"	18"	22"	16 3/8"	20 3/8"	13	1
___ 18" x 18"	20"	20"	18 3/8"	18 3/8"	12	1
___ 20" x 24"	22"	26"	20 3/8"	24 3/8"	15	2
___ 20" x 30"	22"	32"	20 3/8"	30 3/8"	20	4
___ 22" x 22"	24"	24"	22 3/8"	22 3/8"	17	4
___ 22" x 30"	24"	32"	22 3/8"	30 3/8"	22	4
___ 22" x 36"	24"	38"	22 3/8"	36 3/8"	24	5
___ 24" x 24"	26"	26"	24 3/8"	24 3/8"	18	4
___ 24" x 30"	26"	32"	24 3/8"	30 3/8"	22	5
___ 24" x 36"	26"	38"	24 3/8"	36 3/8"	25	5
___ 30" x 30"	32"	32"	30 3/8"	30 3/8"	30	5
___ 36" x 36"	38"	38"	36 3/8"	36 3/8"	41	5
___ X	___"	___"	___"	___"		

SPECIAL SIZES AND SPECIAL MODIFICATIONS CAN BE FABRICATED ON REQUEST.

For information on security access panels: See J.L. Industries Detention Specialties, Sweet's 11190/JLI or call factory.